



4520 TRACTOR & ATTACHMENTS

ONE TOUGH TRACTOR



Turf Maintenance

Finish Mower	4-5
Wide Area Mower	6-7
Flail Mowers	8-9
Tough Cut Mower	10-11
Contour Mower	12-13
Reel Mower	14-15
Aera-Vator	16-17
Aerator	18-19

Snow & Debris removal

Narrow Broom	20-21
V-Blade	22-23
Straight Blade	24-25
Snow Blower	26-27
Drop Spreader	28-29
Winter Cab	30-31
Turbine Blower	32-33
Power Blower	34-35

Soil & Site Preparation

Power Bucket	36-37
Power Rake	38-39
Landscape Rake	40-41
Tiller	42-43
Trencher	44-45

Speciality Attachments

Edger	46-47
Stump Grinder	48-49
Sod Cutter	50-51
Leaf Plow	52-53
Groomer/Renovator	54-55
Boom Mower	56-57

Specifications & Accessories

Tractor Accessories	58-59
Specifications	60-61
Warranty	62

4520 TRACTOR

Features

- Ventrac Mount System
- Center Articulating & Oscillating Frame
- Dual Range Hydrostatic All-wheel Drive Transmission
- Patented S.D.L.A. Controls
- Industrial Grade Engine Options
- Adjustable Weight Transfer System
- Commercial Grade Design
- Premium Comfort Seat

Tractor

Engine	Kubota D902
Fuel	Diesel
HP (SAE J1995 gross)	25
Cooling	Liquid
Cylinders	3
Torque	42 ft/lb
Max Slope Intermittent Use**	30° (58%)
Max Slope Continuous Use**	20° (36%)

4520Y

Engine	Kubota D902
Fuel	Diesel
HP (SAE J1995 gross)	25
Cooling	Liquid
Cylinders	3
Torque	42 ft/lb
Max Slope Intermittent Use**	30° (58%)
Max Slope Continuous Use**	20° (36%)




Slope Ratings



20°
36% GRADE

Standard



25°
47% GRADE

Wheel Ext.



30°
58% GRADE

Dual Wheels

** For slope operation over 20°, Wheel Extensions are required for up to 25° or Dual Wheels are required for up to 30°

FINISH MOWER

Specification

Mower	MU720
Mower Type	Rear Discharge
Width of Cut	72"
Cutting Height	1-5"
Weight	540 lbs

Features

- Easy Flip-Up Deck
- Large Discharge Chute
- Easy Lever Height Adjustment



Safer Mowing: Designed for Stability on Hillside



- Full-Floating Deck
- Rear Striping Roller Standard
- Optional Mulching Kit



Easy Access: Flip-Up Deck for Easy Service



Contour following: Fully Rotating Deck



WIDE AREA MOWER

Specification

Mower	MK960
Mower Type	Rear Discharge
Width of Cut	95"
Cutting Height	1-5"
Weight	580 lbs

Features

- Easy Flip-Up Deck
- Tool-Free Height Adjust
- Standard Rear Roller Striping

- Front Anti-Scalp Rollers
- Tool-Free Belt Tensioners
- Offset Caster Wheel for Superior Trimming



Speed: Tackle Large Areas and Save Time



Easy Access: Flip-Up Deck for Easy Service



Productivity: 95" Width of Cut

FLAIL MOWERS

Specification

Mowers	MW720	MY720	MW560	MY560
Mower Type	Fine cut	Fast cut	Fine cut	Fast cut
Blade type	Scoop	Y	Scoop	Y
No of blades	36	72	24"	48
Width of Cut	72"	72"	56"	56"
Cutting Height	1"-5"	1"-5"	1"-5"	1"-5"

Features

- Two Options for Fine Turf or High Volume
- Two Cutting Widths: 56" or 72"
- Heavy-Duty Steel Construction
- Rotor Speed 3000 rpm
- No Tools for Height Adjustment
- Flip-Up deck for easy cleaning



Finer Turf: The MW560/720 are ideal



Easy maintenance: flip-up deck



Heavy work: choose the MY560/720



TOUGH CUT MOWER

Specification

Mower	HQ682
Mower Type	Rough, Rear Discharge
Tractor Compatibility	4500
Width of Cut	68"
Cutting Height	3.5"-7"
Weight	475 lbs

Features

- Heavy Duty Blades
- Heavy-Duty Steel Construction
- 3 Cutting Heights
- Counter Rotating Blades
- Hydraulic Lift
- Tilt-Up Deck for Easy Cleaning
- Swivel Wheel Kit for Deck Stability



Out Front: Clear the Path Ahead of the Tractor



Easy Maintenance: Tilt-Up Deck



Slope Mowing: Brush cutting made easy

CONTOUR MOWER

Specification

Contour Mower	MJ840
Tractor Compatibility	4500/4520
Width of Cut	83"
Cutting Height	.75" - 3.5"
Side Decks Up/Down Range of Motion	+/- 40°
Weight	584 lbs

Features

- Multi-Directional Contour
- Rear Discharge
- Flip-Up Deck Design
- Front Rollers for Anti-Scalping
- Full Rear Roller for Even Cutting & Striping
- Belt Drive with Gearbox for Mechanical Efficiency & Reliability



Reduced Scalping: Contours the Uneven Terrain



Triple Float: 3 Independent Floating Decks



Quality Finish: Get a Consistent Professional Cut



REEL MOWER

Specification

Reel Mower	MR740
Tractor Compatibility	4500/4520
Width of Cut	74"
Cutting Height	.39" - 2.36"
Weight	613 lbs

Features


- Fully serviceable, easy to maintain
- Superior edge retention & life for the bed-knife & reel
- Low pressure, low temperature hydraulic reel drive for long-lasting service
- Identical reel heads are simple & easy to change
- Bypass valves enable/disable each motor individually
- Simple & quick reel speed adjustment
- Fully adjustable grass discharge deflectors



Heavy Duty & High Quality: Built to Last



Difficult Terrain: Go Where No Other Reel Can Go

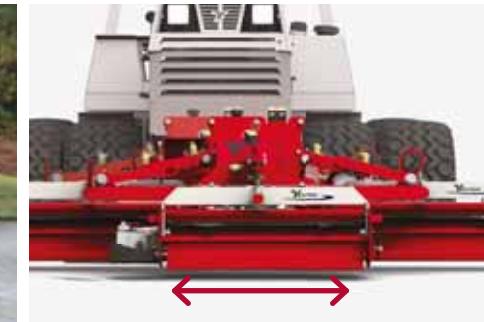

Offset Capability: Offset reels right & left of center

AERA-VATOR

Specification

AERA-Vator	EA600
Tractor Compatibility	4500/4520
Working Width	60"
Aeration Density	8 holes/ft ²
Vibrating Depth	2.75"
Weight	420 lbs

Features

- Fractures Soil Without Plugs
- Heavy-Duty Vibrating Tines
- Optional Over-Seeder Available
- Creates 8 holes/square-foot
- Weight Mounting Bar



Cores Turf While Loosening Soil



Keep Your Turf Healthy and Vibrant



Reseed Grass While Aerating

AERATOR

Specification

Aerator	EB480
Tractor Compatibility	4500/4520
Working Width	48"
Aeration Density	6 holes/ft ²
Hole Depth	Up to 3"
Weight	240 lbs

Features

- Three Tine Options for Fracturing, Slicing, or Coring
- Quick and Easy to Replace Tines
- Weight Mounting Bar
- Add Optional Weights for Increased Ground Penetration



Tine Options: Fracturing, Slicing, or Coring



Perfect for Large Estates



Keep Lawns Healthy and Vibrant

NARROW BROOM

Specification

Narrow Broom **KJ520**

Tractor Compatibility	4500/4520
Working Width	52"
Angled Width	48"
Broom Speed	277 rpm
Weight	500 lbs

Features

- Perfect for Paths and Pavements
- Hydraulic Power Angle from Operator Position
- Adjustable Gauge Wheels
- Adjustable Bristle Speed & Direction (Requires Optional Electric Actuator)



Perfect for Paths and Pavements



Reverse Rotation**: Sweep Up Close



Four Seasons: Use Your Broom Year-Round



V-BLADE

Specification

V-Blade	KV552
Tractor Compatibility	4500/4520
Width	48-55"
Height	24"
Wing Angle	+/-30°
Weight	240 lbs



V-Position



Scoop Position



Angle Position

Features

- Hydraulically Angle Either Wing (Requires 12 Volt Switch Plug Kit)
 - Adjustable Cast Iron Skid Shoes
 - Adjustable Spring Controlled Trip Mechanism
 - Trip Lockout Pin for Digging in Material
 - Hardened Reversible Cutting Edge
- 1 Optional Polyurethane Cutting Edge
 - 2 Optional 6-Inch Straight Edge Extensions
 - 3 Optional 6-Inch Extensions with 6-Inch Top Flare



STRAIGHT BLADE

Specification

Blades	KD482	KD602	KD722
Tractor Compatibility	4500/4520	4500/4520	4500/4520
Width	48"	60"	72"
Height	22"	22"	22"
Angle	+/-30°	+/-30°	+/-30°
Weight	163 lbs	203 lbs	225 lbs

Features

- Hydraulically Angle Left/Right
- Hardened Cutting Edge
- Trip Lockout Pin for Digging in Material
- Commercial Grade Design
- Hardened Reversible Cutting Edge
- Adjustable Cast Iron Skid Shoes
- Optional Polyurethane Cutting Edge



Rear Mount: Using 3-N-1 Adapter & 3-Point Hitch



Four Seasons: Use Your Blade Year-Round



Versatility: Use to Backfill, Level or Push Material

SNOW BLOWER

Specification

Snow Blower **KX523**

Tractor Compatibility	4500/4520
Width	52"
Blowing Distance	Up to 50'
Max Snow Capacity	4500 lbs/min
Chute Rotation	220°



Optional Deep Snow Auger

Features

- 2-Stage System
- Hydraulically Controlled
- Double Spiral Serrated Auger
- Double Hinged Chute Deflector with Optional Electric Actuator
- 180 to 220 Degree Rotation Discharge Chute
- Chute Guard Quick Release Latches
- Front Crossbar Protection Bumper
- Optional Deep Snow Auger



Launch Snow Over Obstacles



Industrial-Grade Sidewalk Snow Blower



Hydraulically Adjust Chute Angle



SIDEWALK DROP SPREADER

Specification

Drop Spreader	SA250
Tractor Compatibility	4500/4520
Overall Height	22"
Drop Width	40"
Material Capacity	2.5 ft ³ /200 lbs
Spreading Distance*	3 miles

* Typical Application Rate is based on using bagged rock salt at 3.5 lbs/1 thousand ft² at 5 mph application speed under ideal conditions. Distance will vary based on your application rate and operating conditions.

Features

- Universal Mounting Options
- Precision Drop-Rate Control
- 12V Electric Drive/Transmission
- Increases Salt Savings
- Consistent Drop Pattern
- Easy Flow Adjustments
- Innovative Agitation System
- Capacity 2.5 ft³/200lbs
- Weatherproof Cover



Universal Mounting Kits Available



Wireless Remote Operation



Double Capacity with Extension Hopper



SUMMER LEVEL COMFORT

WINTER CAB

Specification

Winter Cab	KW452
Tractor Compatibility	4500/4520
Overall Height	74"
Overall Length	59"
Overall Width	50"
Weight	385 lbs

Features

- Dual-Port USB Charger
- Superior Headroom for Operator Comfort
- All Standard & Optional Cab Lights are LED for Low Current Draw & High Light Output
- Variable Heat Control Settings
- Breakaway LED Strobe Kit
- Optional Windshield Washer Kit



Easy Access to Cab Switches & Fuse Panel



Exceptional Visibility



LED Light Kits

TURBINE BLOWER

Specification

Turbine Blower	ET202
Tractor Compatibility	4500/4520
Length	69.25"
Width	28"
Height Nozzle Down	36"
Nozzle Size	12"
Max Wind Speed*	175 mph
Weight	290 lbs
* Speed with Engine at 3650 RPM	

Features

- One-Piece Polymer Blower Nozzle
- Flat Free Caster Wheel
- High Volume Air Flow
- Hydraulic 360 Degree Nozzle Rotation
- Built-In Nozzle Guard



High Volume Air Flow for Clearing Large Areas



Clears Light Snow, Leaves, and Debris



Less Noise Than Conventional Leaf Blowers

POWER BLOWER

Specification

Power Blower	KA160
Tractor Compatibility	4500/4520
Wind Speed	180 mph
Volume	4000 cfm
Fan Blades	16
180° Hydraulic Rotation	Standard
Weight	170 lbs

Features

- Forced Air Speeds of up to 180 mph
- 180 Degrees Left to Right Rotation
- Two Heavy-Duty Gauge Wheels
- Powerful 14-Inch Fan Blade



Excellent Hydraulic Control



Adjustable Nozzle for Controlled Blowing



Clear Leaves From Your Property Fast


POWER BUCKET

Specification

Power Bucket	HE482
Tractor Compatibility	4500/4520
Working Width	48"
Capacity	6ft ³
Grapple	Optional
Bucket Extensions	Optional
Cutting Teeth	Optional
Weight	190 lbs

Features

- Serrated Side Edges
- Hardened Cutting Edge
- Easy Hydraulic Controls

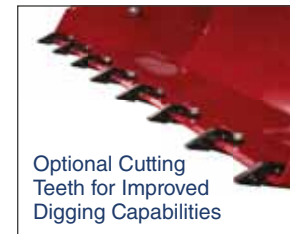

Optional Cutting Teeth for Improved Digging Capabilities



Bigger Loads: Extension To Increase Capacity



Versatility: Most Useful Tool To Own



Grapple: Lift More, Do More

POWER RAKE

Specification

Power Rake	KP540
Tractor Compatibility	4500/4520
Rotor Width	54"
Carbide Tips	72
Rotor Depth Adjustment	+2"/-6"
Weight	655 lbs

Features

- Hydraulic Rotor Height Adjustment
- Replaceable Carbide Tips (without removing rotor)
- Forward and Reverse Rotation from Operator Seat
- Hydraulic Driven Rotor
- Hydraulic Angle Control
- Adjustable End Plates for Material Routing
- Puncture-free Caster Wheels



Efficiency: Quickly Prepare New Lawn Installation



Refresh: Bring New Life To Your Driveways & More



Power: 72 carbide tips pulverize the surface

LANDSCAPE RAKE

Specification

Landscape Rake	KR502
Tractor Compatibility	4500/4520
Rotor Width	49"
Tines Count	28
Angle Right to Left	+/-28°
Weight	250 lbs

Features

- Hydraulically Controlled Left/Right Angling
- Adjustable Front Gauge Wheels
- Curved Tines Work in Either Direction
- Front-Mounted to Avoid Tractor Compaction
- Optional Side Extensions Available

Optional Hydraulic Height Adjust



Soil Prep: Clear Debris For New Lawns



Leveling: Smooth Out Gravel, Sand, & More



Up Front: Clear Areas Before Running Over Them

TILLER

Specification

Tiller	KL480
Tractor Compatibility	4500/4520
Working Width	48"
Max Till Depth	6"
Weight	356 lbs

Features

- Intermediate Gear Reduction for Quiet Running
- Sealed Lubricated Final Drive
- Leveler Shield
- Skid Shoe Adjustments
- 24 High-Performance Carbon Tines



Reverse Operation for Undisturbed Tilled Areas



Thoroughly Tills Hard Ground & Vegetation



Out Front Operation for Precision Control

TRENCHER

Specification

Trencher	KY400
Tractor Compatibility	4500/4520
Trenching Width	5.5"
Trenching Depth	40"
Cutting Teeth	43
Depth Indicator	Standard
Weight	480 lbs

Features

- Carbide Cutting Tips for Digging in Variety of Soil Conditions
- Depth Indicator for Accurate Depth of Cut
- Dual Push-N-Pull Cylinders for Greater Boom Control
- Adjustable Crumb Scraper
- 40-Inch Cutting Depth with 5.5-Inch Width



Compact Design: Operate in Tight Spaces



Heavy-Duty: Carbide Tips Cut Tough Terrain



Light Footprint: Minimal Turf Damage & Work Mess

EDGER

Specification

Edger	ED202
Tractor Compatibility	4500/4520
Disc Diameter	20"
Max Cutting Depth	6"
Weight	200 lbs

Features

- Reversible Cutting Disc for Edging or Bed Shaping
- Right or Left side Edging Capability
- 2 Position Telescoping Arm
- Debris Blower
- Adjustable Blade Angle to Change the Width of the Cut Edge
- Weight Bar



Bevel Out: Reverse Disc To Shape Beds



Add Weight: Cut Deeper & More Evenly



Clear Path: Blower Cleans Up Debris Left Behind

STUMP GRINDER

Specification

Stump Grinder **KC220**

Tractor Compatibility	4500/4520
Carbide Tips	18 (3 sided replaceable)
Cutter Head Width	3.5"
Overall Cutter Head Diameter	22"
Cutter Head Speed	1300 rpm
Cutting Depth Below Ground Level	8"
Weight	420 lbs

Features

- Replaceable Carbide Hardened Teeth
- Convex Mirror for Safely Viewing Operation from Tractor
- Gear Driven for Smooth Power Transfer



Quick Work: Removes Stumps In Minutes



Less Mess: Less Disturbance To Surrounding Turf



Efficiency: Agile, powerful and turf-friendly

SOD CUTTER

Specification

Sod Cutter	EG240
Tractor Compatibility	4500/4520
Cutting Width	24"
Cutting Depth	0 - 2.5"
Weight	38 lb

Features

- Easy adjustment from 0 to 2 ½ inch Cutting Depth
- Maintenance Free Roller
- 24-inch Cutting Knife



Clean Cut: Consistent & Even Cut



Adjustable: Shave Any Amount Up To 2.5-Inches



Roll-Up: Creates Easy-To-Move Rolls of Sod

LEAF PLOW

Specification

Leaf Plow	EF300
Tractor Compatibility	4500/4520
Working Width	78"
Height	50"
Bristle Height	8"
Caster Wheels	Adjustable

Features

- 8" Dual-Bristle Brush for Optimum Sweeping
- Expanded (See-Through) Steel Back for Visibility
- Trip-Free Design
- Adjustable Caster Wheels
- Replaceable Brushes



Mounting: Front or rear mounted



Capacity: Moves large amounts of leaves



Versatility: Use in conjunction with blower

BOOM MOWER

Specification

Boom Mower	MA900
Tractor Compatibility	4500/4520
Mower Type	Reciprocating
Width of Cut	39"
Vertical Reach (from ground)	142"
Horizontal Reach (outside of dual wheels)	103"
Max Flat Top Cut (from ground)	82"
Weight	880 lbs

- Mow steep ditches
- Cut vegetation around ponds, lakes and streams
- Reach under fences and guard rails
- Trim tree branches along trails, pathways and roads
- Trim hedges and other shrubs



Cut around ponds and streams



Trim hedge lines with ease



Top hedges and other shrubs


BALLPARK GROOMER AND RENOVATOR

Specifications

Ballpark Groomer	DG550 (Front, Renovator)	DR540 (Rear, Groomer)
Tractor Compatibility	4500/4520	4500/4520
Overall Height	19"	26.25"
Overall Length	46"	19"
Overall Width	56"	60.5"
Brush, Steel Drag, Cocoa Mat	N/A	Optional

Features

- Three Replaceable Knives for Cutting Edge Lines & Leveling Material
- Replaceable Scarifier Spring Tines
- Dual Adjustable Leveling Bars
- Half-Inch Spikes for Breaking Up Hard Ground
- Steel Roller for Compacting Material
- Optional Brush Kit for Field Finishing
- Optional Drag Mats for Final Finish Work

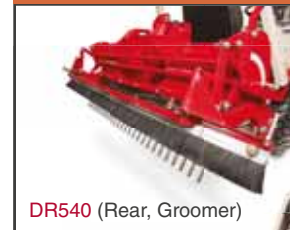

DR540 (Rear, Groomer)



DG550 (Front, Renovator)



Field Leveling: Maintain Smooth Playing Surfaces



Weed Control: Quickly Remove Infield Grass Creep



A Perfect Finish: Multiple Grooming Accessories

ACCESSORIES

**ENCLOSED CAB**

Protection from wind, rain and snow.

**CANOPY**

Provides shade for operator.

**HEATED
SUSPENSION SEAT**

Ride all day in the comfort of a well supported suspension seat.

**DUAL WHEEL KIT**

Increase stability, traction and safety on slopes up to 30°.

**FOOT PEDAL CONTROL**

A more traditional style foot control for forward and reverse functions.

**RAISED PLATFORM**

Increases height of foot platform for easier reach and comfort.

**SA250 SIDEWALK
DROP SPREADER**

71 Litre / 91 kg capacity

**WHEEL EXTENSIONS**

Increase stability on slopes up to 25°.

**NARROW TYRE & CHAINS**

The tyre chains help improve traction and reduce wheel spin in rough/steep environments.

**3-POINT**

Add non-PTO powered implements to the rear with the Category One 3-Point Hitch.

**DIRECTIONAL HAZARDS**

Directional LED signals/blinking hazards.

**ES220 SEED/
FERTILIZER/SPREADER**

100 kg capacity

**2-N-1**

Allows for the option of a front 50 mm (2") receiver hitch or front counterweights.

**MID-WEIGHT BAR KIT**

Add up to four additional weights to the middle of your 4000 series Ventrac

**ARM RESTS**

Adds comfort and support, especially while operating on slopes.

**TYRE OPTIONS**

Standard: All-Terrain
Optional: Bar, Turf.

**3-N-1**

Mount non-PTO-powered Ventrac attachments to the rear. Also includes 50 mm (2") receiver for towing, and brackets for additional weight.

**STROBE & WORK LIGHTS**

Provides increased safety for roadside operation and low-visibility situations (comes in two separate kits).

**DIGITAL SLOPE
INDICATOR**

Indicates the degree of slope while tractor is in operation.

**TRAILER MOVER**

An excellent tool for moving a trailer into tight spaces where you cannot fit your truck.

ADDITIONAL ACCESSORIES

- 4-POINT SEAT BELT
- BACKUP ALARM
- HORN
- DUAL AUXILIARY
- HYDRAULICS
- FRONT HITCH LOCK VALVE
- HYDRAULIC TOP LINK

MODEL: **4520Y** KUBOTA Diesel

STOCK CODE	39.51217
ACCESSORY KIT: FRONT FENDERS, FOOT PEGS, 4 REAR WEIGHTS, WEIGHT TRANSFER	Standard

ENGINE

ENGINE	Kubota D902
MAX OPERATING SPEED	3600 rpm
FUEL TYPE	Diesel
HORSEPOWER	25
PEAK TORQUE	56.94 nm
DISPLACEMENT	898 cc
CYLINDERS	3
ENGINE OIL	Ventrac Premium Full Synthetic Engine Oil SAE 10W-30
COOLING	Liquid
FUEL CAPACITY	22.7 L
FUEL ECONOMY [^]	4.2 L/hr
MAX SLOPE RATING (CONTINUOUS / INTERMITTENT)	20° / 30°
ALTERNATOR	60 Amp

DIMENSIONS

WEIGHT WITH STANDARD HITCH	773 kg (1705 lb)
WEIGHT WITH ACCESSORY KIT	N/A
WEIGHT WITH 3-POINT HITCH	810 kg (1785 lb)



[^] Fuel Economy tested with HM602 mower for comparison purposes. Application conditions & attachment will affect fuel economy.

MEASUREMENTS

LENGTH WITH STANDARD HITCH (ROPS UP)	207 cm	(82")
LENGTH WITH 3-POINT HITCH	234 cm	(92")
WIDTH	123 cm	(49")
WIDTH WITH WHEEL EXTENSIONS	138.5 cm	(55")
WIDTH WITH DUALS	185.5 cm	(73")
WHEELBASE (FRONT AXLE TO REAR AXLE)	114 cm	(45")
HEIGHT (ROPS UP)	173 cm	(68")
HEIGHT (ROPS DOWN)	137 cm	(54")
TURNING RADIUS (SINGLE TYRES, STANDARD POSITION)	99 cm	(39")
TURNING RADIUS (POSITION 2)	137 cm	(54")
TURNING RADIUS (POSITION 3)	173 cm	(68")
OSCILLATION AMOUNT (@ WHEEL)	19 cm	(8")
GROUND CLEARANCE	13 cm	(5")

ELECTRICAL

BATTERY	500 CCA (Group 51R)
VOLTAGE	12 volts
BATTERY DISCONNECT	Standard, with 150A System Circuit Breaker
FUSES	Sealed, Mini Fuse and J-Case styles

LIGHTS

HEAD LIGHTS	(4) 1000 Lumen LED Flood Lights
TAIL LIGHTS	(2) Red LED Lights

HITCH AND PTO

FRONT HITCH	Ventrac Mount System
ELECTRIC PTO CLUTCH W/BRAKE	Ogura GT3.5 (250 ft lb)
3-POINT HITCH	Optional Category 1

DRIVETRAIN

HYDRAULIC PUMP	Danfoss 20cc pump
PUMP DRIVE	Direct Drive (Double U-Joint Driveshaft)
HYDRAULIC MOTORS	(2) Danfoss 20cc motors
TRANSAXLES	Peerless 2600 series
AXLES	Peerless 40mm (forged) with integrated forged hub
HYDRAULIC OIL COOLER	Aluminum with Thermostatically controlled Electric Fan
HYDRAULIC OIL FILTER (SUCTION)	25 micron
HYDRAULIC OIL FILTER (PRESSURISED)	10 micron

TRAVEL SPEED (F/R)

LOW RANGE	8 km/h (5 mph) forward / 6.5 km/h (4 mph) reverse
HIGH RANGE	16 km/h (10 mph) forward / 13 km/h (8 mph) reverse

TYRES

STANDARD (ALL-TERRAIN)	22 x 12-8
OPTIONAL TURF	22 x 11-10
OPTIONAL CHAIN TYRE	21 x 11-8

INSTRUMENTS, GAUGES & ALARM

GAUGES	Tachometer, Speedometer, Hour Meter, Engine Temperature (Liquid Cooled Engines Only), Fuel Level, Volt Meter
INDICATOR LIGHTS	Parking Brake, Engine High-Temp [^] , Hydraulic Oil Temp [^] , Low Voltage [^] , Low Oil Pressure [^]
^ACTIVATES AUDIBLE ALARM	
SWITCHES	Key, PTO & Lights

CONTROLS

FORWARD REVERSE	S.D.L.A. (Speed, Direction, Lift & Auxiliary) Handle, Optional Foot Pedal
ATTACHMENT LIFT	S.D.L.A. (Primary Handle)
AUXILIARY HYDRAULICS	S.D.L.A. (Secondary Handle)
THROTTLE	Dash Mounted
FRONT HITCH LOCK	Column Mounted (Accessible from Seat)
PTO BELT TENSIONER	Front Mounted, Automatic Tension Controlled
WEIGHT TRANSFER	5 Position
HIGH/LOW RANGE	Single Lever, Column Mounted
3 PT CONTROLS (OPTIONAL)	Lift + 2 Sets of Auxiliaries
STEERING	Power Steering

OTHER FEATURES


5 AMP USB PORT	Standard
CUP HOLDER	Standard
SEAT	Heated Deluxe High Back Seat (Arm Rests and Suspension Seat Optional)

ROPS

FOLDING ROPS	Standard
HEAVY-DUTY SEAT BELT	Standard

SLOPE RATINGS

MAX SLOPE RATING (Any Direction)	SINGLE TYRES	WHEEL EXTENSIONS	DUAL WHEELS
4520*	20° (36%)	25° (47%)	30° (58%)
4520 WITH CAB	10° (18%)	NOT COMPATIBLE	NOT COMPATIBLE
4520 WITH MA900	10° (18%)	10° (18%)	18° (32%)

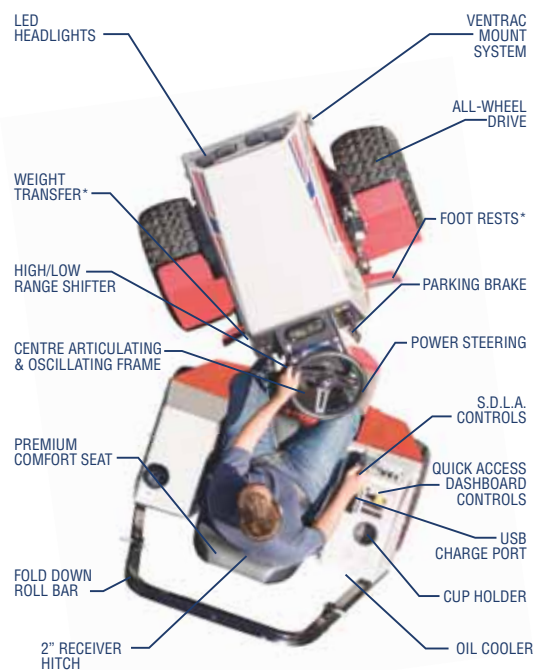4520 STANDARD FEATURES

Intermittent Use Defined: The engine may operate between 20° and 30° for up to 10 minutes. If 10 minutes is reached, the engine must be returned to 20° or less to assure proper oil lubrication. After returning to 20° or less, the intermittent cycle can be repeated.



WARRANTY INFORMATION

ALL NEW VENTRAC TRACTORS AND ATTACHMENTS ARE COVERED BY VENTRAC'S WARRANTY, SO YOU CAN PURCHASE WITH CONFIDENCE!

2-YEAR COMMERCIAL LIMITED WARRANTY

Tractors and attachments all come with 2 years warranty with unlimited hours

ENGINE WARRANTY*

Covered by Kubota's 2-year or 2000 hours warranty**

Limits and conditions apply.

** Please refer to the engine manufacturer's warranty statement included in your owner's manual.*

*** Whichever occurs first*





Schedule a **DEMO** or get a **QUOTE**:
+44 (0) 1284 827540



For more information on Ventrac:
priceturfcare.com



See Ventrac in Action:
youtube.com/ventrac

Distributed by



Tel: +44 (0) 1284 827540
Mobile: 07802 759477
email: info@priceturfcare.com
web: www.priceturfcare.com

f [FACEBOOK.COM/PRICETURFCARE](https://www.facebook.com/priceturfcare)

Instagram icon [INSTAGRAM.COM/PRICETURFCARE](https://www.instagram.com/priceturfcare)

Twitter icon [@PRICETURFCARE.COM](https://twitter.com/PRICETURFCARE)